



MTW-SS DIRECT MOUNT OPERATOR



*see reverse for
min/max field adjustment*

The Macon **MTW-SS** thermostatic valve will help you balance your heating system. The **MTW-SS** operator has one of the most accurate sensors for individual radiator temperature control. The problem of overheating, underheating and wide temperature swings can now be controlled.

The **MTW-SS** thermostatic valve by Macon Controls conserves energy by regulating temperature. Fuel costs can be reduced up to 30%!


The **MTW-SS** is a self-acting adjustable non-electric thermostatic operator. It has anti-freeze position, adjustable max./min. temperature, selected temperature locking feature and can be shutoff completely if required. Each **MTW-SS** thermostatic operator is individually calibrated and conform to ASHRAE standardization rules for temperature regulation. The **MTW-SS**'s smooth shape and narrow air gaps gives a nice operation and makes it easy to keep clean. Can be mounted on all Macon NT series valves. Many are in use throughout the world.



HIGH-HEAT[®]

MACON SPECIFICATIONS

MTW-SS

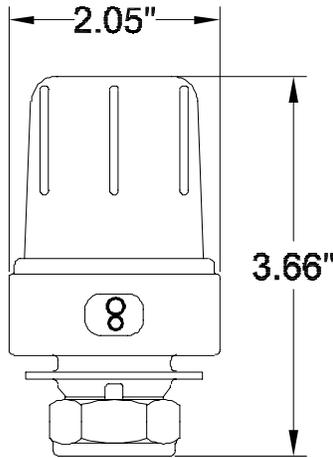

Maximum & minimum setting

Maximum setting

1. Turn the wheel to maximum and a red mark will occur in the indicating window (located opposite the dial setting window).
2. Push the mark in while turning the wheel to desired temperature according to below chart.
3. When reached desired temperature let go of the mark and the maximum temperature limit is set.

Minimum setting

1. Turn the wheel to minimum and a blue mark will occur in the indicating window (located opposite the dial setting window).
2. Push the mark in while turning the wheel to desired temperature according to below chart.
3. When reached desired temperature let go of the mark and the minimum temperature limit is set.

DATA

Temp. Range: 46° - 82°F

Hysteresis: 0.9°F

Heat Transfer: 1.1°F (Valve Housing Sensor)

Dead Time: 0.8 Minutes

Max. Differential Pressure: 20 psi

Suggested Differential Pressure = 0.5 to 2.9 psi

Max. Water Temp.: 250°F

Max. Storage & Ambient Temp.: 122°F

Max. Steam Pressure: 15 psig

Max. Movement: 0.125

Nominal Opening: 0.018 (3.6°F)

Long Term Test: 5000 cycles (1.3°F)

DIAL SETTINGS:

0 = Off

* = 46°F (Frost Protection)

1 = 54°F

3 = 61°F

5 = 68°F

6 = 72°F

7 = 76°F

8 = 80°F

9 = 82°F

